

# Pressure Regulators K Series



- Pressure-reducing models
- Back-pressure models
- Gas cylinder changeover model
- Vaporizing models

**Contents**

- Features, 2
- Operation, 3
- Selection, 3
- Testing, 4
- Cleaning and Packaging, 4

**Pressure-Reducing**



**General-Purpose  
(KPR Series), 6**



**Two-Stage  
(KCY Series), 8**



**High-Sensitivity  
(KLF Series), 10**



**High-Flow,  
High-Sensitivity  
(KHF Series), 12**



**Compact  
(KCP Series), 14**



**Medium- to  
High-Pressure  
(KPP Series), 16**



**High-Flow  
(KPF Series), 18**



**High-Pressure  
(KHP Series), 20**



**High-Pressure  
Hydraulic  
(KHR Series), 22**

**Back-Pressure**



**General-Purpose  
(KBP Series), 24**



**High-Flow,  
High-Sensitivity  
(KFB Series), 26**



**Compact  
(KCB Series), 28**



**Medium- to  
High-Pressure  
(KPB Series), 30**



**High-Pressure  
(KHB Series), 32**

**Specialty Pressure-Reducing**



**Gas Cylinder  
Changeover  
(KCM Series), 34**



**Steam-Heated  
Vaporizing  
(KSV Series), 36**



**Electrically Heated  
Vaporizing  
(KEV Series), 38**

**Flow Data**

- Pressure-Reducing Regulators, 41
- Back-Pressure Regulators, 49

Port Configurations, 52

Options and Accessories, 53

Maintenance Kits, 56

## High-Pressure Piston-Sensing, Pressure-Reducing Regulators (KHP Series)

The KHP series provides control of supply pressures up to 10 000 psig (689 bar). The self-venting capability enables downstream pressure reduction in closed-loop systems.

### Features

- Thrust roller bearing eases operation
- Panel-mounting configuration available
- High-flow, dual-gauze type filter positively retained in inlet port

### Technical Data

#### Maximum Inlet Pressure

- 10 000 psig (689 bar)

#### Pressure Control Ranges

- 0 to 500 psig (34.4 bar) through 100 to 10 000 psig (6.8 to 689 bar)

#### Flow Coefficient (C<sub>v</sub>)

- 0.06 and 0.25

See page 46 and 47 for flow graphs.

### Supply-Pressure Effect

Flow Coefficient (C <sub>v</sub> )	Pressure Control Range		
	Up to 2500 psig (172 bar)	3600 and 6000 psig (248 and 413 bar)	10 000 psig (689 bar)
0.06	1.0	2.6	4.2
0.25	3.3	8.5	14.6

### Maximum Operating Temperature

- 212°F (100°C)

### Weight


- 5.7 lb (2.6 kg)

### Ports

- 1/4 in. female NPT inlet, outlet, and gauge ports



### Materials of Construction

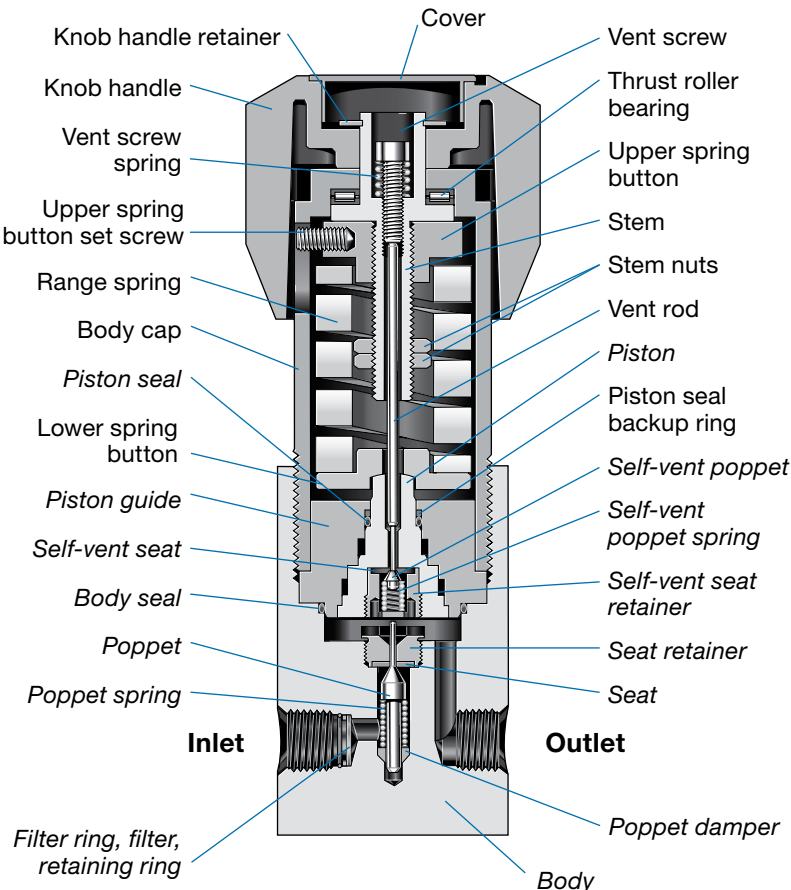


Component	Material
Knob handle, cover	Nylon with 316 SS insert
Spring buttons, upper spring button set screw, knob handle retainer, vent screw, stem nuts, body cap	316 SS
Vent screw spring	302 SS
Vent rod	431 SS
Stem	CZ114 bronze
Thrust roller bearing	Hardened carbon steel
Range spring	Chrome vanadium steel
Piston seal backup ring	PTFE
Nonwetted lubricant	Hydrocarbon-based
<i>Body, seat retainer, filter, retaining ring, piston, piston guide, self-vent seat retainer</i>	316 SS
<i>Seat, self-vent seat</i>	PEEK
<i>Poppet, self-vent poppet</i>	S17400 SS
<i>Poppet spring</i>	Alloy X-750
<i>Poppet damper, filter ring</i>	PTFE
<i>Self-vent poppet spring</i>	302 SS
<i>Body seal, piston seal</i>	Fluorocarbon FKM
<i>Wetted lubricant</i>	PTFE-based

Wetted components listed in italics.

## Dimensions

Dimensions, in inches (millimeters), are for reference only and are subject to change.

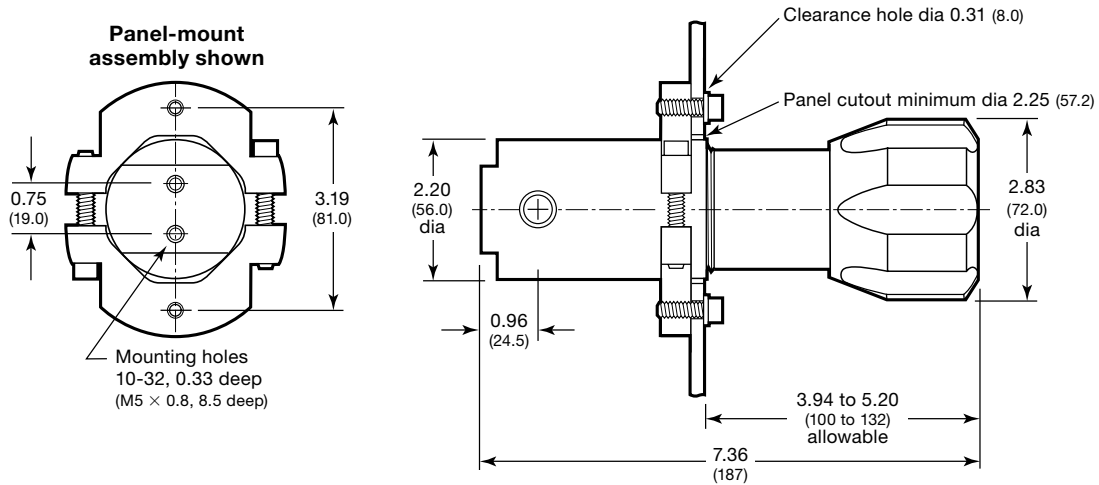

## Ordering Information

Build a KHP series regulator ordering number by combining the designators in the sequence shown below.

4 5 6 7 8 9 10 11 12 13 14 15 16  
**KHP 1 T X A 4 C 2 S 2 0 0 0 0**

### 4 Body Material

1 = 316 SS

A = 316 SS, ASTM G93 Level E-cleaned

### 5 Pressure Control Range

J = 0 to 500 psig (0 to 34.4 bar)

K = 0 to 750 psig (0 to 51.6 bar)

T = 10 to 1500 psig (0.68 to 103 bar)

U = 15 to 2500 psig (1.0 to 172 bar)

V = 25 to 3600 psig (1.7 to 248 bar)

W = 50 to 6000 psig (3.4 to 413 bar)<sup>①</sup>

X = 100 to 10 000 psig (6.8 to 689 bar)<sup>①</sup>

<sup>①</sup> Not available for regulators assembled with isolation valves.

### 6 Maximum Inlet Pressure

X = 10 000 psig (689 bar)

### 7 Port Configuration

A, B, C, E, F, H, K, L, M, N

See **Port Configurations**, page 52.

### 8 Ports

4 = 1/4 in. female NPT

### 9 Seat, Seal Material

C = PEEK, fluorocarbon FKM

### 10 Flow Coefficient (C<sub>v</sub>)

2 = 0.06

6 = 0.25

### 11 Sensing Mechanism, Vent

P = 316 SS piston, no vent

S = 316 SS piston, self vent

### 12 Handle, Mounting

2 = Knob

6 = Knob, panel mount

For knob handle color options, see page 56.

### 13 Isolation Valves

0 = No valves

For isolation valve options, see page 54.

### 14 Cylinder Connections

0 = No connections

### 15 Gauges

0 = No gauges

For inlet and outlet gauge options, see page 54.

### 16 Options

0 = No options