PERCHLOROETHYLENE (LIQUID PHASE) – DYNAMIC VISCOSITY

PCH-2960-0006

Temperature, °C	Dynamic viscosity of perchloroethylene, mPa.s
0	1,11
5	1,05
10	0,99
15	0,94
20	0,89
25	0,84
30	0,80
35	0,76
40	0,73
50	0,66
60	0,61
70	0,56
80	0,51
90	0,48
100	0,44
110	0,41
120	0,38

Reference: Solvay, Algorithm

Solvay Chemicals International SA Rue de Ransbeek 310 B - 1120 Brussels Brussels, RPM 0406804736 +32 2 264 21 11


PCH-2960-0006-W-EN (WW) Issue 1 - December 2007





PERCHLOROETHYLENE (LIQUID PHASE) - DYNAMIC VISCOSITY

Dynamic viscosity of perchloroethylene

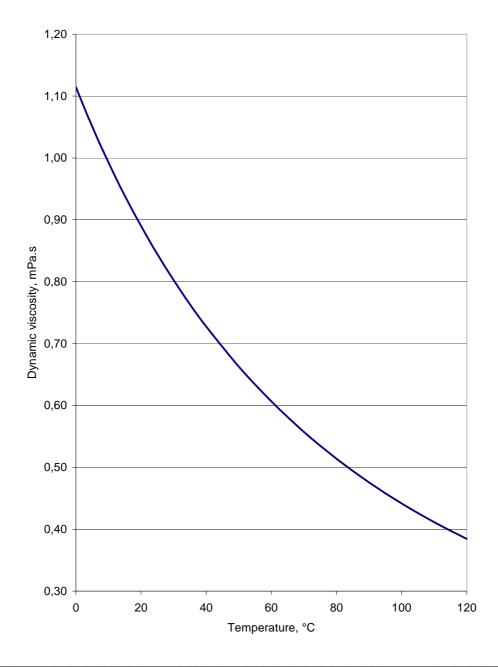

To our present knowledge, the information contained herein is accurate as of the date of this document. However, we do not make any warranty, express or implied, or accept any liability in connection with this information or its use. This information is for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right. The user alone must finally determine suitability of any information or material for any contemplated use, the manner of use in compliance with relevant legislations and whether any patents are infringed. We reserve our right to make additions, deletions, or modifications to the information at any time without prior notification.

Solvay Chemicals International SA Rue de Ransbeek 310 B - 1120 Brussels Brussels, RPM 0406804736 +32 2 264 21 11

www.solvaychemicals.com PCH-2960-0006-W-EN (WW) Issue 1 - December 2007

Solvay Chemicals International



PERCHLOROETHYLENE