



آموزش تنظیم مودم D LINK مدل DSL-2730U



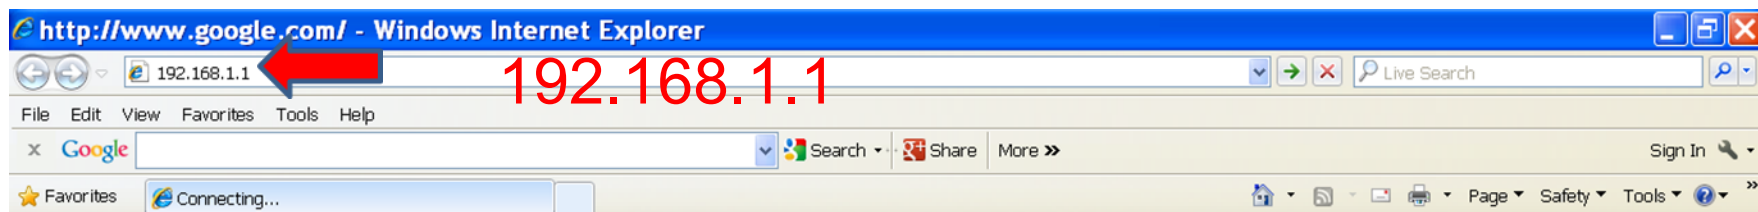

در ابتدا در قسمت نوار آدرس یکی از مرورگرهای خود (اینترنت اکسپلورر، فایرفاکس و ...) آدرس 192.168.1.1 را وارد می کنیم




D-Link


LOGIN

Input username and password

Username :

 Password :

Remember my login info. on this computer



D-Link



DSL-2730U

SETUP

ADVANCED

MANAGEMENT

STATUS

HELP

Wizard



Internet Setup

Wireless

Local Network

Time and Date

Logout

SETTING UP YOUR INTERNET

You can set up the Internet connection through either of the two ways: Web-based InternetConnection Setup Wizard; Manual setup

For manual setup, you need to have the connection settings provided by your ISP.

INTERNET CONNECTION WIZARD

This wizard assists you to quickly connect the new router to the Internet, through step-by-step instructions. Click the button below to begin.



Setup Wizard

Note: Before launching the wizard, please ensure that you have correctly followed the steps outlined in the Quick Installation Guide corresponds to the router.

در ابتدا از منوی بالا گزینه **SET UP**
و بعد از منوی سمت چپ گزینه
WIZARD را انتخاب می کنیم.

STEP 1: SET TIME AND DATE → 2 → 3 → 4 → 5

With the time configuration function, you can configure, update, and maintain the correct time of the internal system clock. In this page, you can set the time zone that you are in and set the network time protocol (NTP) server. You can also configure daylight saving to automatically adjust the time if necessary.

TIME SETTING

Automatically synchronize with Internet time server

Primary NTP time server:

Secondary NTP time server:

Manual setup time: Year Mon Day Hour Min Sec

TIME CONFIGURATION

Time Zone:

Automatically adjust clock for daylight saving changes

Daylight Saving Start: Year Mon Day Hour Min Sec

Daylight Saving End: Year Mon Day Hour Min Sec



STEP 2: SETUP INTERNET CONNECTION → 3 → 4 → 5

Please select your ISP (Internet Service Provider) from the list below.

Protocol : ←

Encapsulation Mode: ←

VPI : (0-255) ←

VCI : (32-65535) ←

Search Available PVC :

PPPOE PPPOA

Please enter the user name and password provided by your Internet service provider (ISP). Note that the information is case-sensitive. Click "Next" to continue.

Username : نام کاربری ارائه شده توسط مخابرات

Password : پسورد ارائه شده توسط مخابرات

Confirm Password : تایید مجدد پسورد



STEP 2: SETUP INTERNET CONNECTION → 3 → 4 → 5

Please select your ISP (Internet Service Provider) from the list below.

Protocol:

Encapsulation Mode:

VPI: (0-255)

VCI: (32-65535)

Search Available PVC:



1 → 2 → 3 → **STEP 4: CONFIGURE WIRELESS NETWORK** → 5

Your wireless network is enabled by default. You can simply uncheck it to disable it and click "Next" to skip configuration of wireless network.

Enable Your Wireless Network

Your wireless network needs a name so it can be easily recognized by wireless clients. For security purposes, it is highly recommended to change the pre-configured network name.

Wireless Network Name (SSID) : (1~32 characters)

نام انتخابی برای وایرلس

Select "Visible" to publish your wireless network and SSID can be found by wireless clients, or select "Invisible" to hide your wireless network so that users need to manually enter SSID in order to connect to your wireless network.

Visibility Status : Visible Invisible

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

Security Level :

None WEP WPA-PSK WPA2-PSK

Security Mode: WPA-PSK
Select this option if your wireless adapters support WPA-PSK.

Now, please enter your wireless security key.

WPA2 Pre-Shared Key :
(8-63 characters, such as a~z, A~Z, or 0~9, i.e. '%Fortress123&')

پسورد 8 رقم به بالا برای وایرلس

Note: You will need to enter the same key here into your wireless clients in order to enable proper wireless connection.

STEP 4: ACCOUNT PASSWORD → 5

Use the fields below to change or create passwords. Note: Password cannot contain a space.

ACCOUNT PASSWORD

Username:

Current Password:

New Password:

Confirm Password:



در این قسمت می توانید برای امنیت بیشتر پسورد مودم را که به صورت پیش فرض
ADMIN می باشد را تغییر دهید. در غیر این صورت می توانید SKIP را بزنید.

STEP 5: COMPLETED AND RESTART

The setup is complete. Click "Back" to review or modify the settings.

If the Internet connection does not work, try the Setup Wizard again with alternative settings, or use manual setup instead if you have the Internet connection details provided by your ISP.

SETUP SUMMARY

The following shows a detailed summary of your settings. Please print this page out or write the information on a piece of paper, and save it, so you can correctly configure the settings on your wireless client adapters later based on the information in this page.

Time Settings :	disable
NTP Server 1 :	not set!
NTP Server 2 :	not set!
Time :	2012-05-23T04:11:19
Daylight Saving Time :	disable
wan_type	DSL
VPI / VCI :	0/35
Protocol :	PPPoE
Connection Type :	LLC
Username :	test
Password :	test
Wireless Network Name (SSID) :	D-Link
Visibility Status :	visible
Encryption :	None
Pre-Shared Key :	not set!
WEP Key :	not set!
New password:	admin

