



Course Instructor
Dr. Raymond C. Rumpf
Office: A-337
Phone: (915) 747-6958
E-Mail: rcrumpf@utep.edu



Vector Calculus:

Mathematical Preliminaries

EE3321

Electromagnetic Field Theory



Outline



- Phasors
- Phasor Arithmetic
- Scalars & Vectors

Phasors (1 of 2)



A time-harmonic function can be written as

$$y(t) = A \cos(\omega t + \theta)$$

Recall Euler's Identity

$$e^{j\theta} = \cos \theta + j \sin \theta$$

This lets the function $y(t)$ be written as

$$\begin{aligned} y(t) &= \operatorname{Re} \left[A e^{j(\omega t + \theta)} \right] \\ &= \operatorname{Re} \left[A e^{j\omega t} e^{j\theta} \right] \end{aligned}$$

Phasors (2 of 2)




$$y(t) = \operatorname{Re} \left[A e^{j\omega t} e^{j\theta} \right]$$

In linear problems, frequency is constant. This means the $e^{j\omega t}$ term never changes. Therefore, it is usually dropped when writing harmonic functions as phasors.

$$y(t) = A \cos(\omega t + \theta) \quad \longleftrightarrow \quad \boxed{Y = A e^{j\theta}}$$


Visualization of a Phasor



$$y(t) = A \cos(\omega t + \theta)$$


↕

$Y = Ae^{j\theta}$

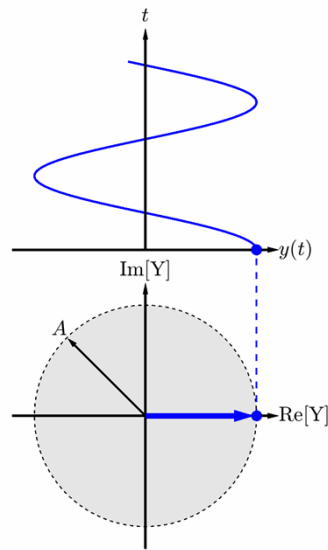

Vector Calculus -- Math Preliminaries Slide 5

Polar Vs. Rectangular Form



A phasor in polar form is written as

$$Y = Ae^{j\theta} \text{ or } A \angle \theta$$

The same phasor written in rectangular form is

$$Y = \alpha + j\beta$$

<u>Rect → Polar</u>	<u>Polar → Rect</u>
$A = \sqrt{\alpha^2 + \beta^2}$	$\alpha = A \cos \theta$
$\theta = \tan^{-1} \left(\frac{\beta}{\alpha} \right)$	$\beta = A \sin \theta$

Vector Calculus -- Math Preliminaries Slide 6

Phasor Arithmetic



Addition

$$F_1 + F_2 = (\alpha_1 + \alpha_2) + j(\beta_1 + \beta_2)$$

Subtraction

$$F_1 - F_2 = (\alpha_1 - \alpha_2) + j(\beta_1 - \beta_2)$$

Multiplication

$$F_1 \cdot F_2 = (A_1 A_2) \angle (\theta_1 + \theta_2)$$

Division

$$F_1 \div F_2 = (A_1 \div A_2) \angle (\theta_1 - \theta_2)$$

Scalars & Vectors



Scalar Numbers

Scalars contain only one piece of information, magnitude. Scalars can be real or complex. Phasors are scalar quantities.


Examples: 7, π , -1.34, etc.


Vectors

Vectors have both a magnitude and a direction.

Examples: Velocity, force, electromagnetic fields

Vector Notation



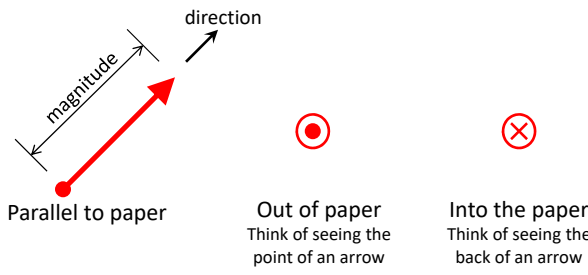


Parallel to paper Out of paper Into the paper


Think of seeing the point of an arrow Think of seeing the back of an arrow

Note: Despite the arrow extending away from the point, a vector is describing something at that specific point and it does not actually extend outward.

Vector Calculus -- Math Preliminaries
Slide 9

Inward/Outward Notation



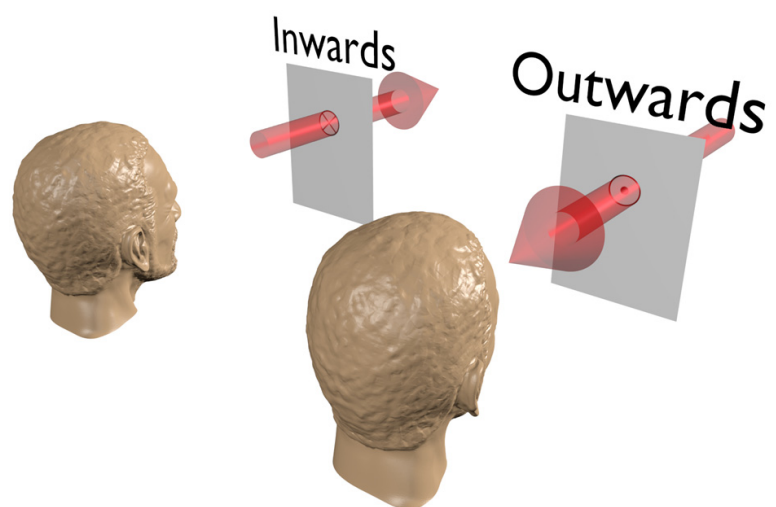


Vector Calculus -- Math Preliminaries
Slide 10

What Can Vectors Convey?




Position




Position relative to the origin.

Distance



Vectors can indicate distance, but the origin is not given.

Disturbance



A vector can represent a directional disturbance. Think of this as a push.

Vector Calculus -- Math Preliminaries

Slide 11

Simple Vector Calculations



3D Vector

$$\vec{A} = A_x \hat{x} + A_y \hat{y} + A_z \hat{z}$$

Vector Magnitude

$$|\vec{A}| = \sqrt{A_x^2 + A_y^2 + A_z^2}$$

Unit Vector

$$\hat{A} = \frac{\vec{A}}{|\vec{A}|}$$

Vector Calculus -- Math Preliminaries

Slide 12